


IP- (Google Chrome),
192.168.1.1 ():

Username: **Administrator** Password: **qazwsx**

Username: **admin** Password: **adminroot**

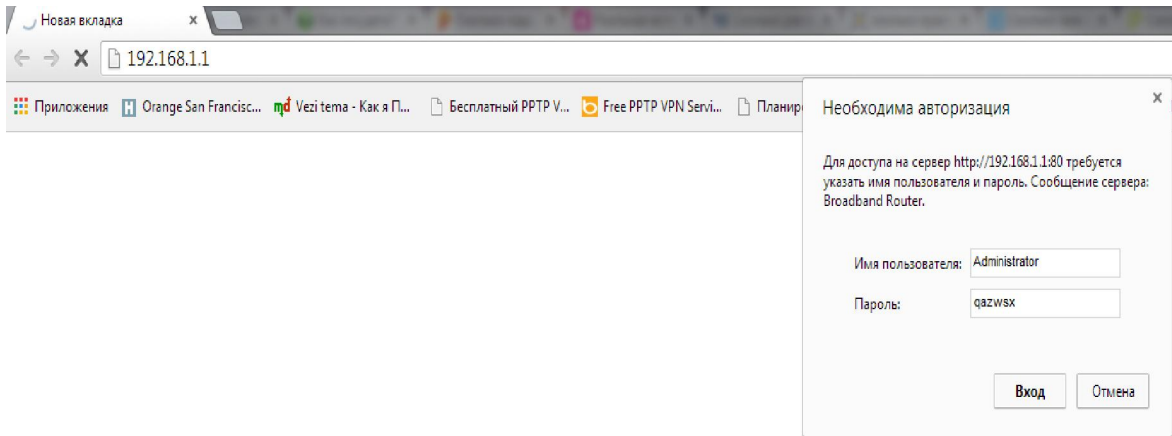

.1

ADSL

ADSL router GT-5802W

Device Info

Board ID:	963281TAN
Build Timestamp:	140304_1441
Software Version:	4.10L.0.1
Bootloader (CFE) Version:	1.0.38-114.185
DSL PHY and Driver Version:	A2pD038f.d24j
Wireless Driver Version:	6.30.102.7.cpe4.12L08.0
MAC Address:	A4:D3:B5:00:27:BA
Uptime:	0D:0H:10M:45S

This information reflects the current status of your WAN connection.


Line Rate - Upstream (Kbps):	0
Line Rate - Downstream (Kbps):	0
LAN IPv4 Address:	192.168.1.1
Default Gateway:	
Primary DNS Server:	0.0.0.0
Secondary DNS Server:	0.0.0.0
LAN IPv6 ULA Address:	
Default IPv6 Gateway:	
Date/Time:	Thu Jan 1 00:10:45 1970

.2

.2 , : Glitel 5802W
: TAN

. 2 4.10L.01,
Glitel 5802W rev.TAN 4.10L.02.


help.mtc.md.
Glitel 5802W rev.TAN . 3

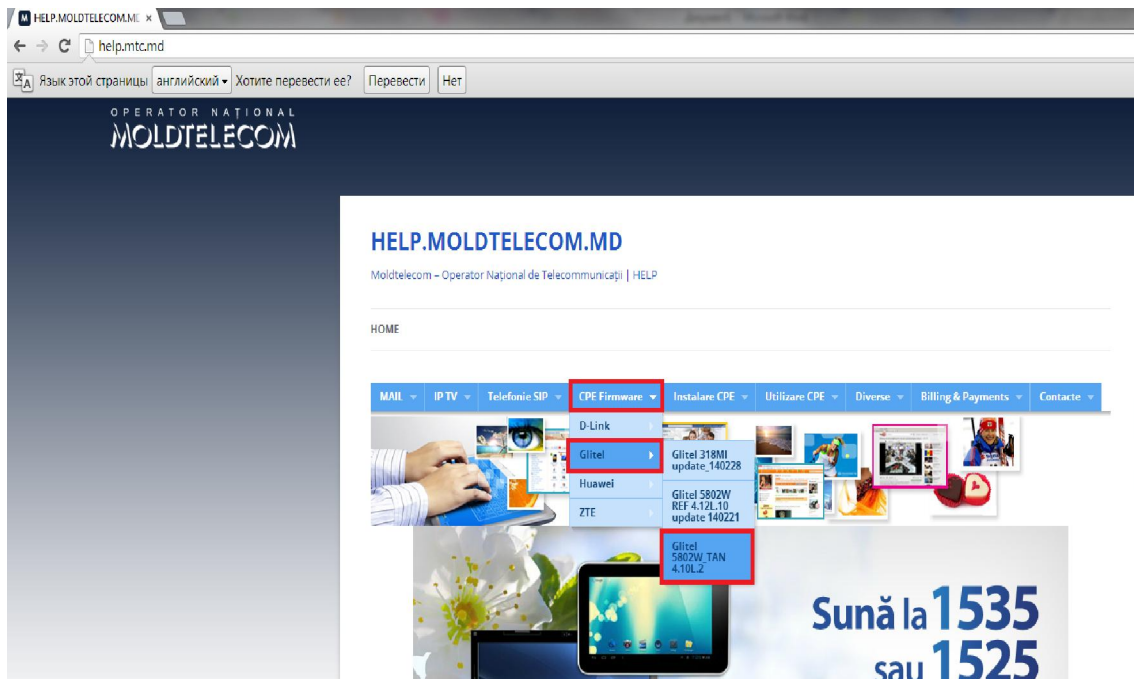


. 3

ADSL 4.10L.02, ADSL
: *Management/*

Update Software.

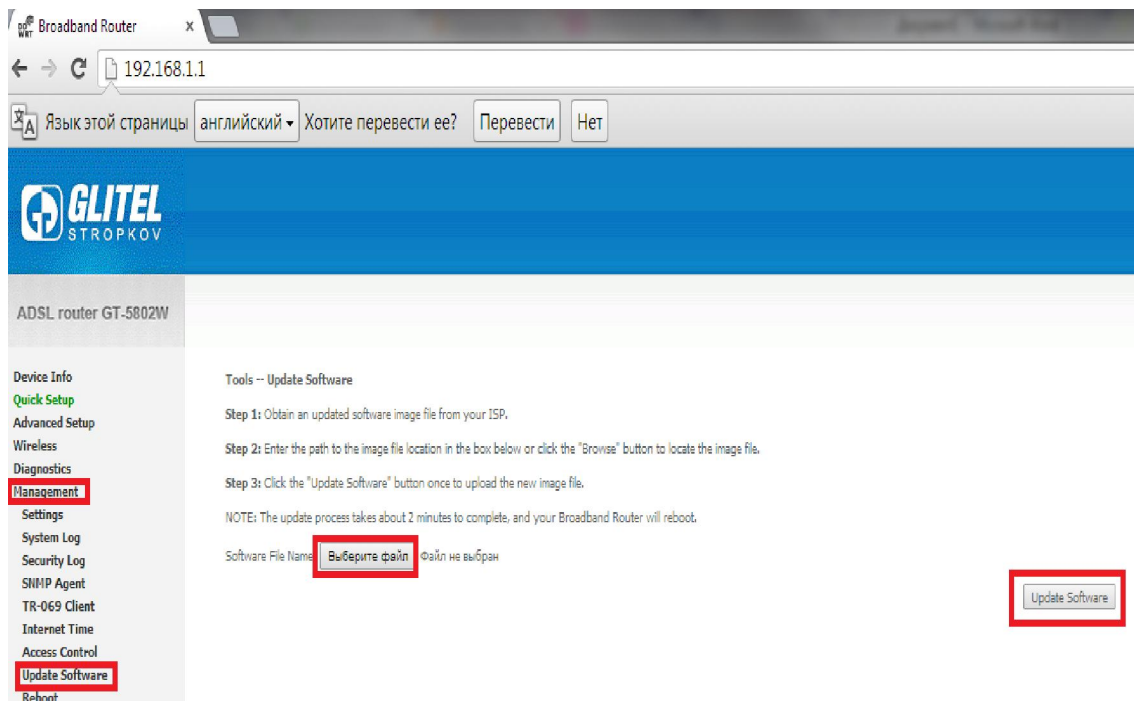

. 4

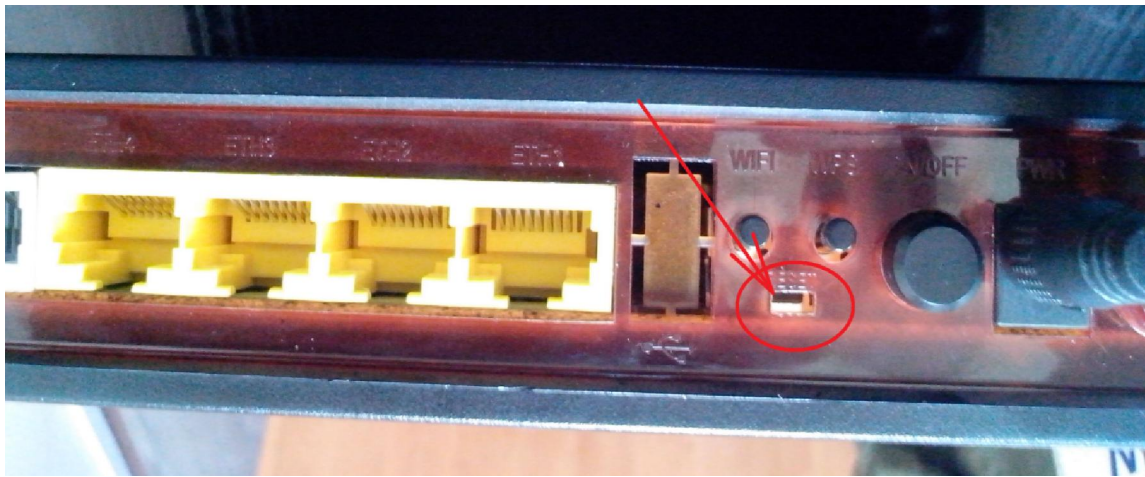

.6

2) - :
 Default Web- Management/Settings/Restore
Restore Default Settings.
 " " .5.

!!!

(reset emergency restore mode).


- (Reset emergency restore mode):
 1. .6.
 2. (reset) 30
 3. IP-

ADSL 192.168.1.1.

Update Software (fig.7)

(factory

defaults). 5.

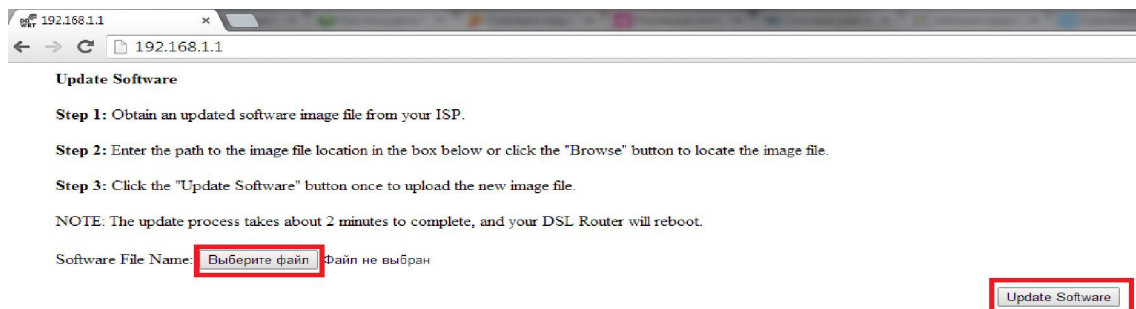


.7

TR-069:

ADSL
ATM 0.1

IP-

: Device Info/WAN
.8.

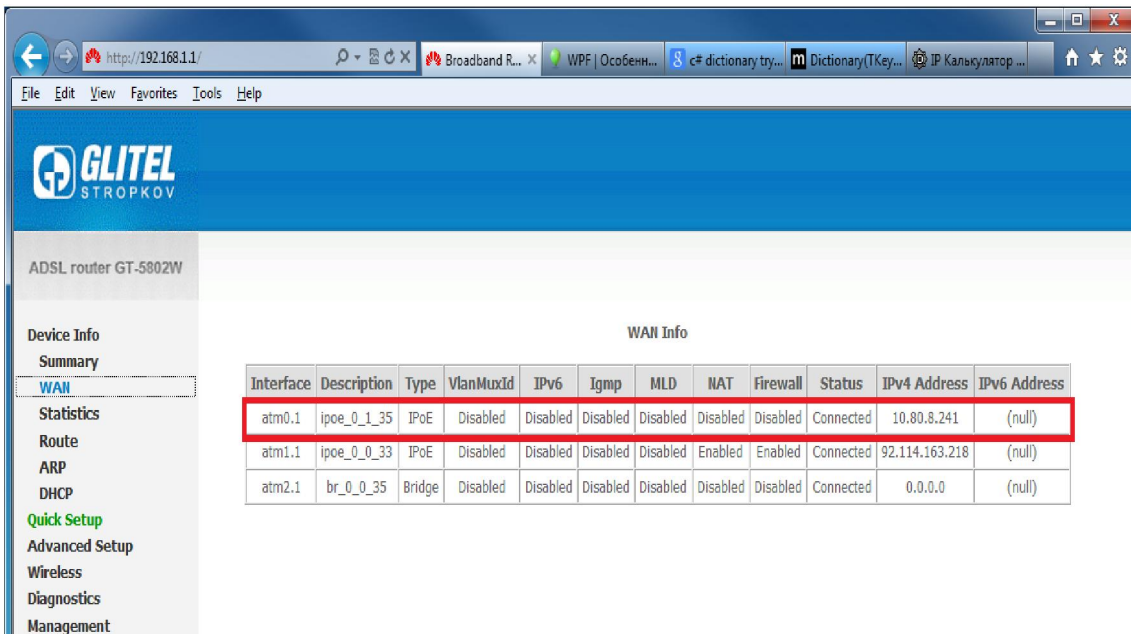


.8

Client

IP-

Enable TR-069 Client.

: Management/TR - 069
.9

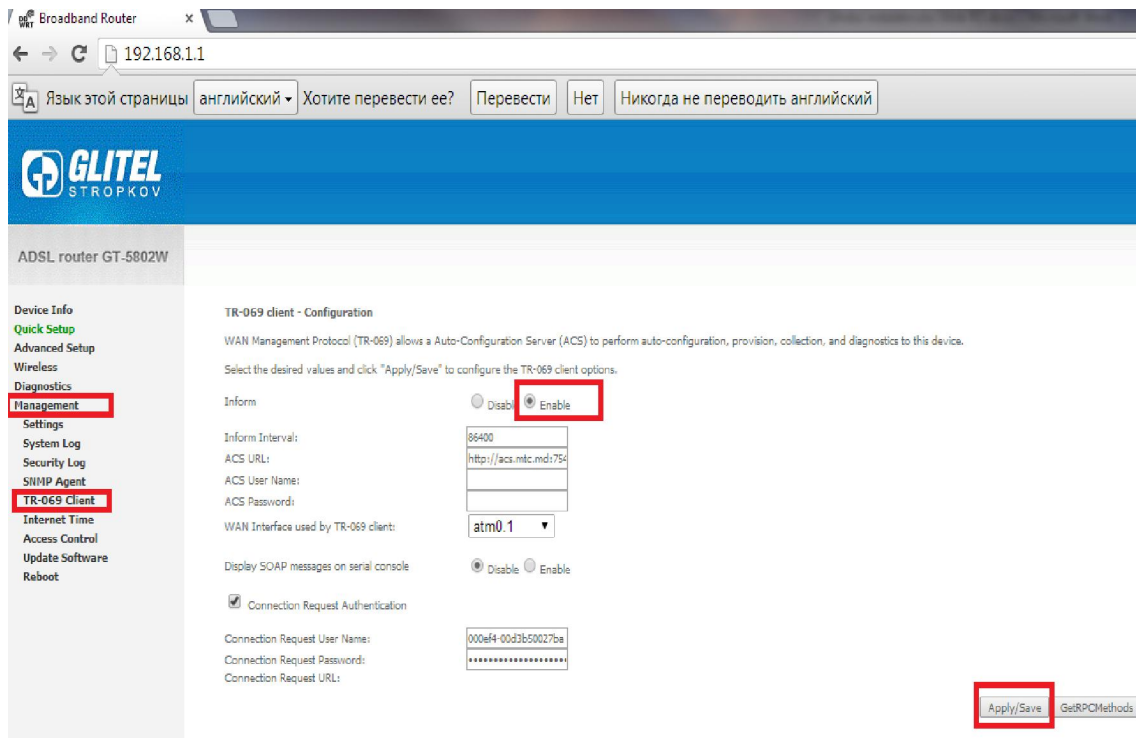

.9